

Learn to code – free 3,000-hour curriculum

JANUARY 28, 2021 / #GIT

How to Use Branches in Git – the Ultimate Cheatsheet



Tobias Günther



Branches are one of the core concepts in Git. And there's an endless amount of things you can do with them. You can create and delete them, rename and publish them, switch and compare them... and so much more.

Learn to code – free 3,000-hour curriculum

will provide links if you want to learn more.

Here's an overview of what we're going to cover:

- How to create branches
- How to rename branches
- How to switch branches
- How to publish branches
- How to track branches
- How to delete branches
- How to merge branches
- How to rebase branches
- How to compare branches

How to Create a Branch in Git

Before you can work with branches, you need to have some in your repository. So let's start by talking about how to create branches:

```
$ git branch <new-branch-name>
```

When providing just a name to the `git branch` command, Git will assume that you want to start your new branch based on your

Learn to code – free 3,000-hour curriculum

```
$ git branch <new-branch-name> 89a2faad
```

It goes without saying that you can only create new branches in your local repository. "Creating" branches in a remote repository happens by publishing an *existing local* branch - which we'll talk about later.

How to Rename a Branch in Git

Mistyping a branch's name or simply changing your mind after the fact is all too easy. That's why Git makes it pretty easy to rename a local branch. If you want to rename your current HEAD branch, you can use the following command:

```
$ git branch -m <new-name>
```

In case you'd like to rename a different local branch (which is NOT currently checked out), you'll have to provide the old *and* the new name:

```
$ git branch -m <old-name> <new-name>
```


These commands, again, are used to work with local branches. If you'd like to rename a remote branch, things are a little bit more

Learn to code – free 3,000-hour curriculum

one and then pushing up the new one from your local repository:

```
# First, delete the current / old branch:  
$ git push origin --delete <old-name>  
  
# Then, simply push the new local branch with the correct name:  
$ git push -u origin <new-name>
```

If you're using a Git desktop GUI like Tower, you won't be bothered with these details: you can simply rename both local and remote branches from a contextual menu (no need to delete and re-push anything):

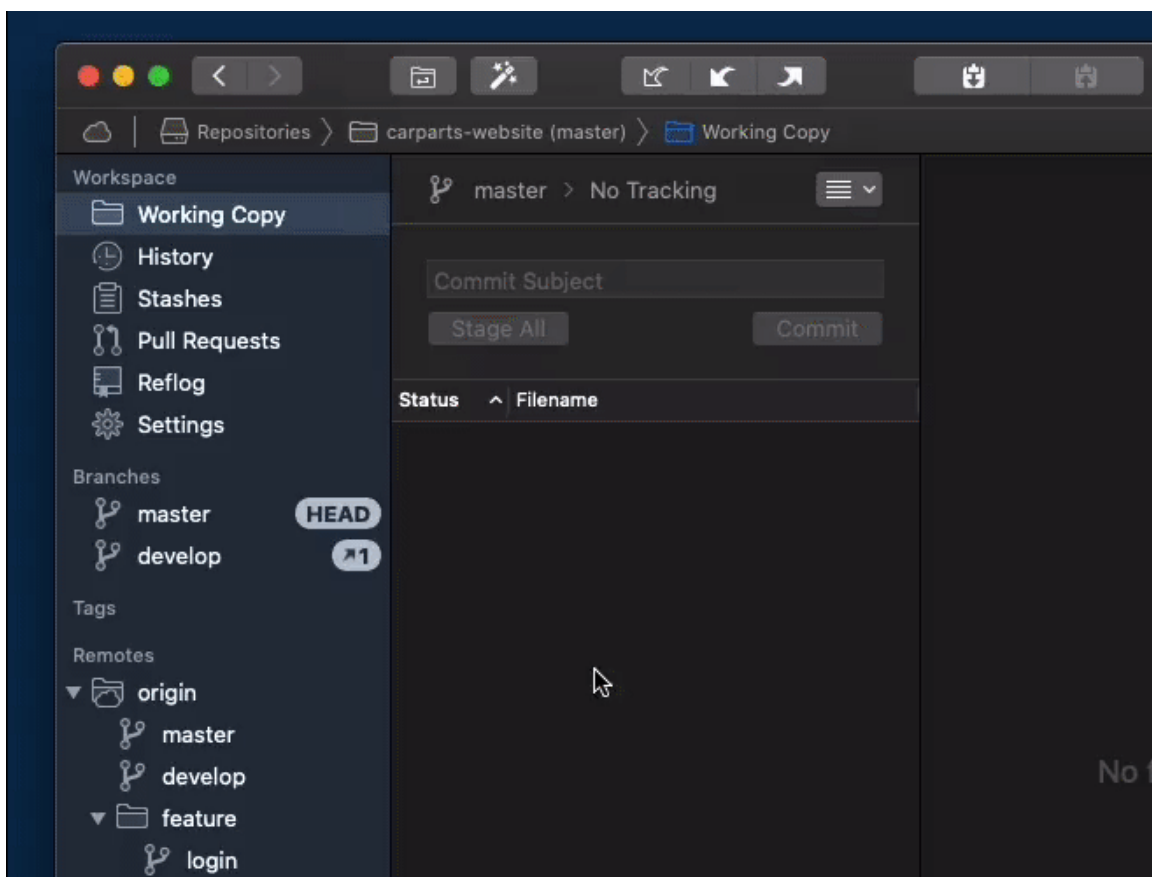

Learn to code – free 3,000-hour curriculum

How to Switch Branches in Git

The current branch (also referred to as the HEAD branch) defines the context you're working in at the moment. Or in other words: the current HEAD branch is where new commits will be created.

Having said that, it makes sense that *switching* the currently active branch is one of the most-used actions any developer performs when working with branches.

And since switching branches is also referred to as "checking out" branches, you won't be surprised to learn the command that's used to make this happen:

```
$ git checkout <other-branch>
```

However, because the `git checkout` command has so many different

Learn to code – free 3,000-hour curriculum

```
$ git switch <other-branch>
```

I think it makes a lot of sense to move away from the `checkout` command – because it's used to perform so many different actions – and instead move towards the new `switch` command, which is absolutely unambiguous about what it does.

How to Publish a Branch in Git

As I already said in the section about "creating branches" above, it's not possible to *create* a new branch on a remote repository.

What we can do, however, is *publish an existing local branch* on a remote repository. We can "upload" what we have locally to the remote and thereby share it with our team:

```
$ git push -u origin <local-branch>
```

The command, overall, is probably not a big surprise for you. But one parameter, the `-u` flag, is worth explaining – which I'll do in the next section.


But to give you the short version here: it tells Git to establish a "tracking connection" which will make pushing and pulling much easier in the future.

Learn to code – free 3,000-hour curriculum

other. They are stored and managed as independent objects in Git.

But in real life, of course, local and remote branches often *do* have a relationship with each other. For example, a remote branch is often something like the "counterpart" of a local one.

Such a relationship can be modeled in Git: one branch (typically a local one) can "track" another one (typically remote).

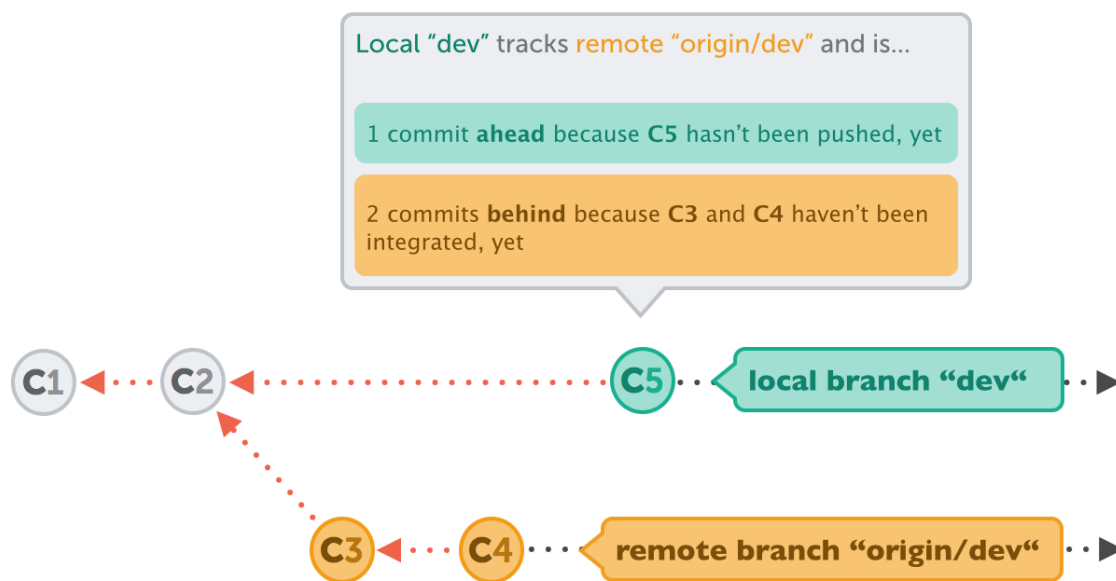

Once such a tracking relationship has been established, a couple of things will become a lot easier: most notably, when pushing or pulling, you can simply use the vanilla commands without any further parameters (for example, a simple `git push`).

The tracking connection helps Git fill in the blanks – which branch on which remote you want to push to, for example.

Learn to code – free 3,000-hour curriculum

local branch for the first time does exactly that. After that, you can simply use `git push` without mentioning the remote or the target branch.

This also works the other way around: when creating a local branch that should be based on a remote one. In other words, when you want to *track* a remote branch:

```
$ git branch --track <new-branch> origin/<base-branch>
```

Alternatively, you could also use the `git checkout` command to achieve this. If you want to name the local branch after the remote one, you only have to specify the remote branch's name:

```
$ git checkout --track origin/<base-branch>
```

If you want to learn more about this topic, check out this [post about "Tracking Relationships in Git"](#).

How to Delete a Branch in Git

Not all branches are meant to live forever. In fact, most branches in any repository will be short-lived. So if you find yourself wanting to do a little housecleaning, here's how to delete a local branch:

Learn to code – free 3,000-hour curriculum

Note that you might also need the `-f` option in case you're trying to delete a branch that contains un-merged changes. Use this option with care because it makes losing data very easy!

To delete a remote branch, we cannot use the `git branch` command. Instead, `git push` will do the trick, using the `--delete` flag:

```
$ git push origin --delete <branch-name>
```

When deleting a branch, keep in mind that you need to check if you should delete its counterpart branch, too.

For example, if you have just deleted a remote feature branch, it might make sense to also delete its local tracking branch. That way, you make sure you aren't left with lots of obsolete branches – and a messy Git repository.

How to Merge Branches in Git


Merging is probably the most popular way to integrate changes. It allows you to bring all of the new commits from another branch into your current HEAD branch.

One of the great things about Git is that merging branches is so simple and stress-free. It requires just two steps:

Learn to code – free 3,000-hour curriculum

```
$ git merge feature/contact-form
```

Often, the result of a merge will be a separate new commit, the so-called "merge commit". This is where Git combines the incoming changes. You can think of it like a knot that connects two branches.

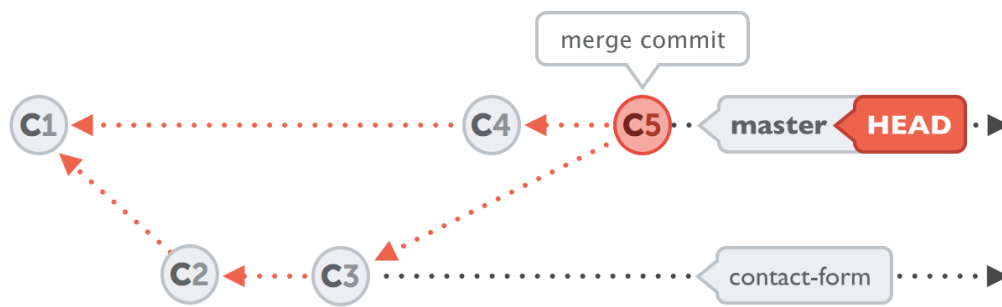

There is, of course, a lot more to say about `git merge`. Here are some free resources that help you learn more:


- [How to Undo a Merge in Git](#)
- [How to Fix and Solve Merge Conflicts](#)
- [An Overview of "git merge"](#)

How to Rebase Branches in Git


An alternative way to integrate commits from another branch is using `rebase`. And I'm very careful to call it an "alternative" way: it's not better or worse, but simply different.

Learn to code – free 3,000-hour curriculum

To illustrate the differences between merge and rebase, take a look at the following illustrations. Using `git merge`, the result of our integration of *branch-B* into *branch-A* would look like this:

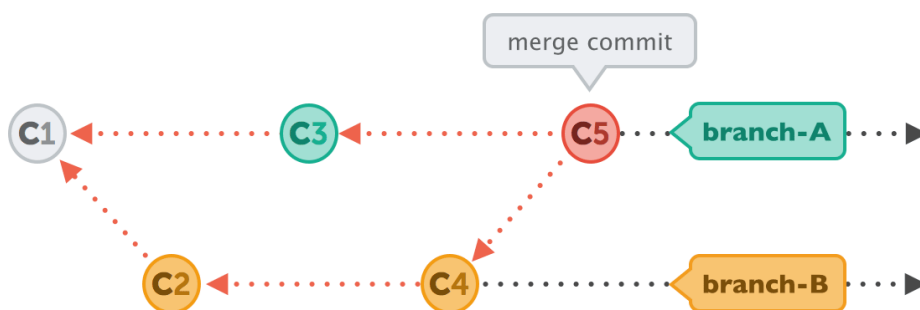

Using `git rebase`, on the other hand, the end result will look quite different – especially because no separate merge commit will be created. Using rebase, it appears as if your development history happened in a straight line:

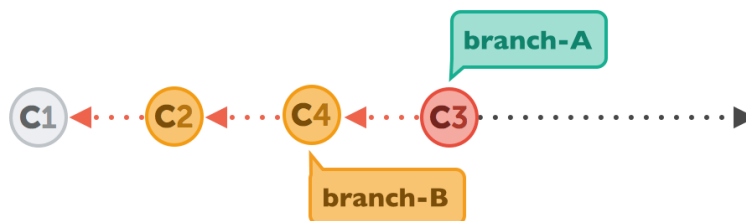

Starting the actual process is pretty simple:

Learn to code – free 3,000-hour curriculum

```
$ git rebase main
```

For a deeper understanding of rebase, I recommend the post "[Using git rebase instead of git merge](#)".

How to Compare Branches in Git

In certain situations, it can be very helpful to compare two branches. For example, before you decide to integrate or delete a branch, it's interesting to see how it differs from another branch. Does it contain any new commits? And if so: are they valuable?

To see which commits are in branch-B but not in branch-A, you can use the `git log` command with the double dot syntax:

```
$ git log branch-A..branch-B
```

Of course, you could also use this to compare your local and remote states by writing something like `git log main..origin/main`.

If instead of the *commits* you'd prefer to see the *actual changes* that make up those differences, you can use the `git diff` command:

```
$ git diff branch-A..branch-B
```

Learn to code – free 3,000-hour curriculum

with Git

Working with branches in Git has many facets! But this is true for Git in general: there's a ton of powerful features that many developers don't know or can't use productively.

From Interactive Rebase to Submodules and from the Reflog to File History: it pays to learn these advanced features – by becoming more productive and making fewer mistakes.

One particularly helpful topic is learning how to **undo mistakes with Git**. If you want to dive deeper into how you can save your neck from the inevitable mistakes, check out [this video about undoing mistakes in Git](#).

Have fun becoming a better programmer!

About the Author

[Tobias Günther](#) is the Co-founder of [Tower](#), the popular Git desktop client that helps more than 100,000 developers around the world to be more productive with Git.



Tobias Günther

Tobias Günther is the CEO of "Tower", the popular Git desktop client that helps more than 100,000 developers around the world to be more productive with Git. --> @gntr // www.git-tower.com

Learn to code – free 3,000-hour curriculum

Learn to code for free. freeCodeCamp's open source curriculum has helped more than 40,000 people get jobs as developers.

[Get started](#)

freeCodeCamp is a donor-supported tax-exempt 501(c)(3) nonprofit organization (United States Federal Tax Identification Number: 82-0779546)

Our mission: to help people learn to code for free. We accomplish this by creating thousands of videos, articles, and interactive coding lessons - all freely available to the public. We also have thousands of freeCodeCamp study groups around the world.

Donations to freeCodeCamp go toward our education initiatives, and help pay for servers, services, and staff.

You can make a tax-deductible donation here.

Trending Guides

What is Docker?

TCP/IP Model

RTF File

CSS Transition

How to Use Instagram?

MBR VS GPT

FAT32 Format

Error 503 Code

Windows Hosts File

What is STEM?

JavaScript Void 0

SQL Delete Row

JavaScript Replace

Python JSON Parser

cmd Delete Folder

What is NFC?

Content Type JSON

Convert HEIC to JPG

[Forum](#)[Donate](#)

Learn to code – free 3,000-hour curriculum

[Qualitative VS Quantitative](#)[Antimalware Executable](#)[JavaScript Split String](#)[Windows 10 Start Menu](#)[Accented Letters on Mac](#)[Windows 10 Command Line](#)[Windows 10 Product Key](#)[Google Account Recovery](#)

Our Nonprofit

[About](#) [Alumni Network](#) [Open Source](#) [Shop](#) [Support](#) [Sponsors](#) [Academic Honesty](#)[Code of Conduct](#) [Privacy Policy](#) [Terms of Service](#) [Copyright Policy](#)